

WEBASTO UNITE x MONTA

1


Prepare.

You need

-Access to the UNITE web interface (either on the hotspot or in the local network)

-Access to the Monta Charging Portal or the new Charging Hub (<https://portal2.monta.app>)-The ChargePoint ID of your wallbox (e.g. 7000335522000003). This can be found on the housing, for example.

WEBASTO UNITE x MONTA

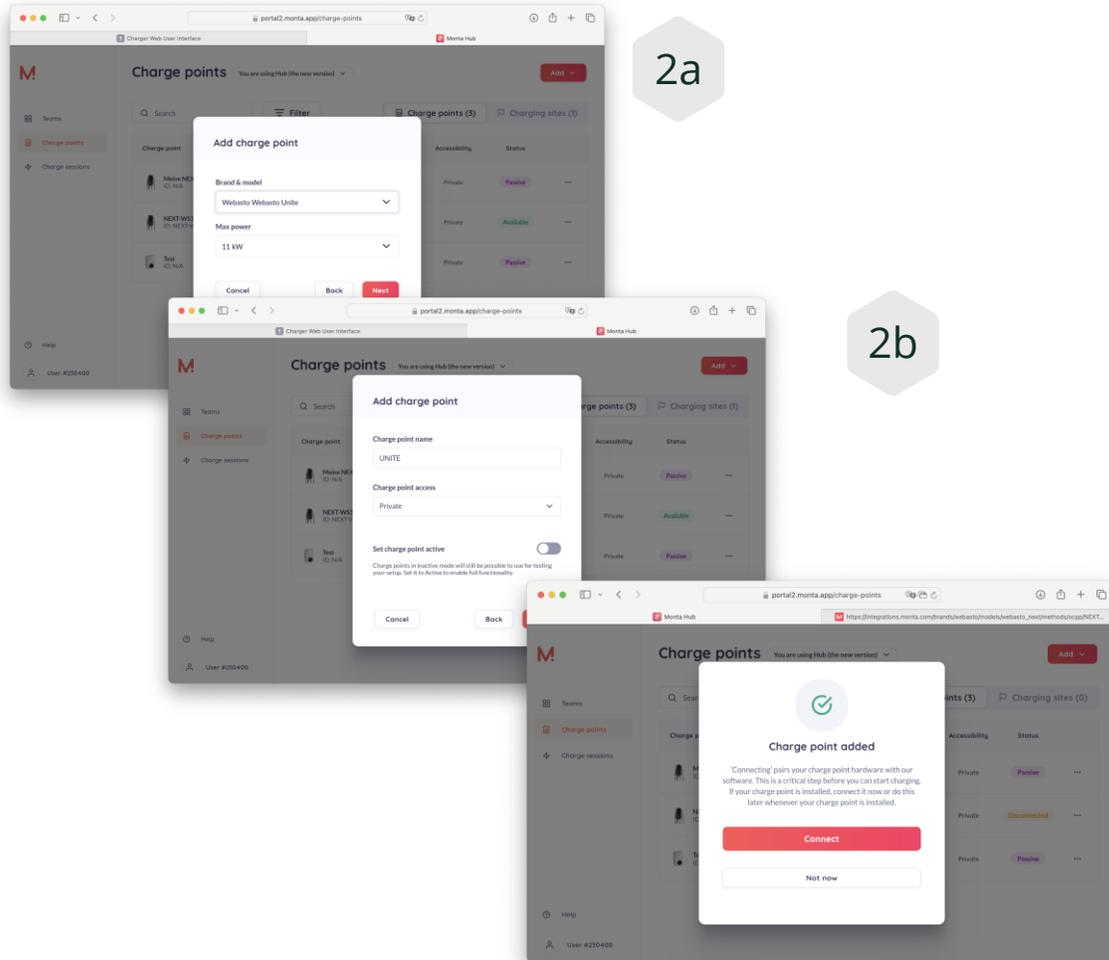

2

Set up in Monta

You need

-Add a new ChargePoint and select
“Webasto Unite 11kW”

-Select the location

-Enter the details (Private or Public and any
name)

-Click on “CONNECT” to access the
Integration Manager


WEBASTO UNITE x MONTA

3


Set up in Monta

- -In the Integration Manager, select OCPP
- -Then enter the ChargePoint ID, upper/lower case is important.
- -Click on “Continue”. You will receive the backend endpoint to be entered in the wallbox, at least:
`wss://ocpp.monta.app`

3a

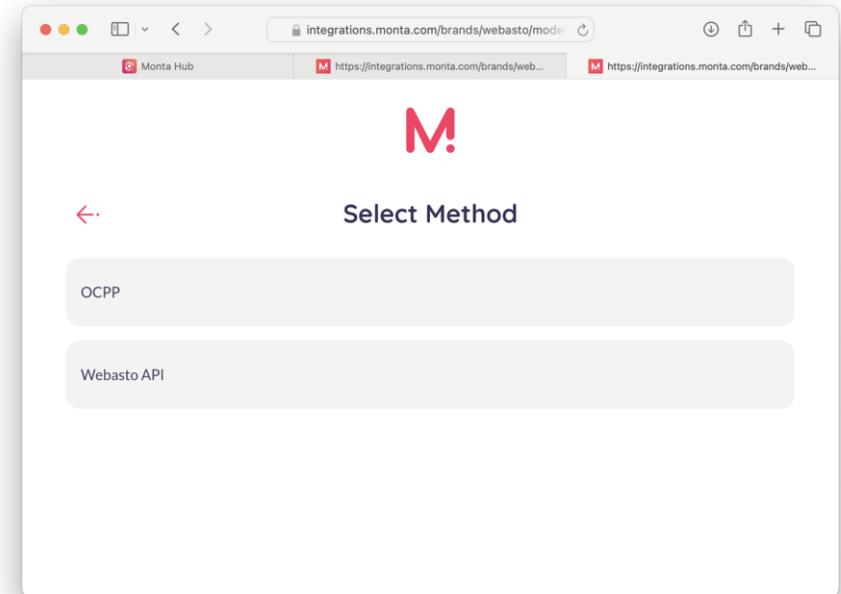

3b

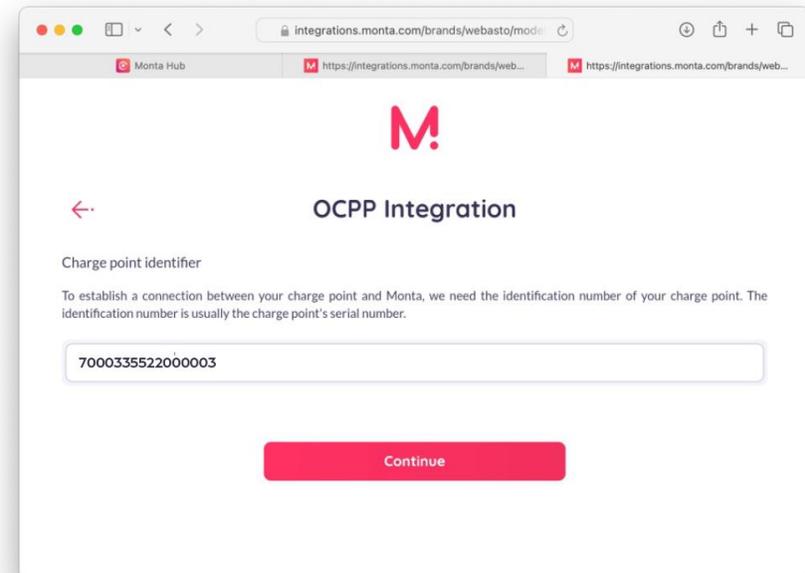

WEBASTO UNITE x MONTA



4

Configuration of UNITE

It is important that the UNITE is connected to the Internet either via 4G, WLAN or LAN. This can be checked if at least one IP number can be seen in the main menu.

-Under “Backend”, enter the backend endpoint of Monta: `wss://ocpp.monta.app`

Then click on “Save” or “Save”.The configuration of Unite is now complete.

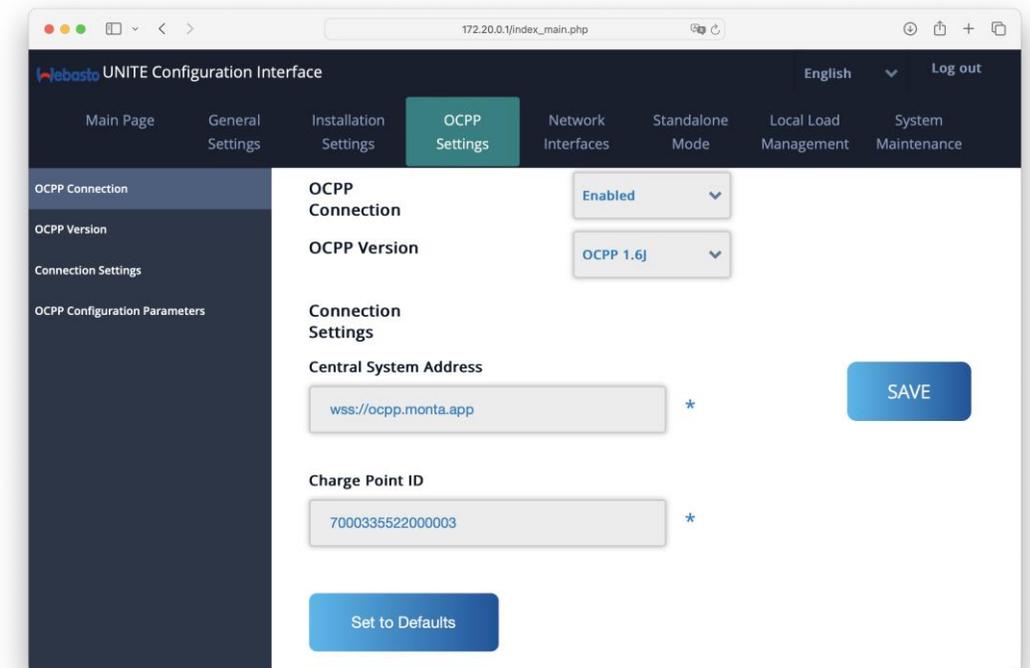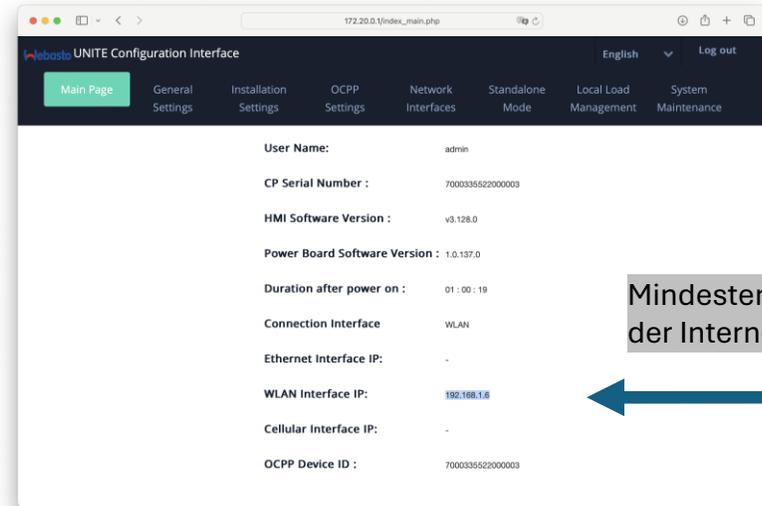



WEBASTO UNITE x MONTA

5

Final step

Now click on “Yes, pair charge point” in the Monta Portal. The portal now accepts the connection and pairs with the box.

Yes, pair charge point

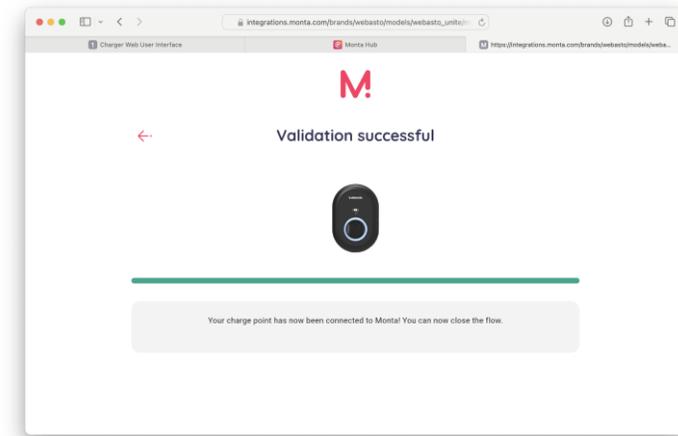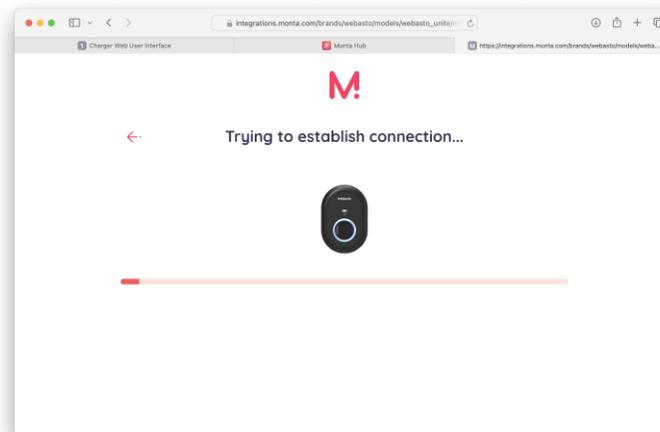

WEBASTO UNITE x MONTA

6

Check

A correct backend connection is displayed in Monta. The ChargePoint ID is visible in UNITE and should be identical.

